

Analysis of Box Culvert to Reduce Stress Values

Vasu Shekhar Tanwar¹, Dr. M. P. Verma², Sagar Jamle³

¹MTech (SE) Scholar, Department Of Civil Engineering, Oriental University, Indore, MP, India

²Prof. & Head, Department Of Civil Engineering, Oriental University, Indore, MP, India

³Assistant Professor, Department Of Civil Engineering, Oriental University, Indore, MP, India

Abstract—At the time of construction of roads, highways a structure is placed (commonly used) to transfer the traffic, rain water, drainage from one side to another of the road is called a culvert placed beneath the road. Due to the structural use, multiple loads are placed on the box causing various types of stress which occurs on it. The paper tries to reduce the stress occurred in the box by flaring the box partially.

Keywords—Box culvert, flared portion, pressure cases, side walls, staad pro.

I. INTRODUCTION

Culvert is an underpass provided beneath the high way which under goes various types of loading .It helps to facilities the flow of water, provide cross drainage, roadways or railways, to take electrical or other cables from one side of road to another side of the road . due construction of these high load bearing components various stress and shear gets generated in very high values the paper objects to reduce the values of the stress which have been generated for various cases.

II. TYPES OF CULVERTS

1 On basis of shape:-

- 1.1 Pipe culvert
- 1.2 Pipe Arch culvert
- 1.3 Box Culvert (single/multiple)
- 1.4 Arch culvert
- 1.5 Bridge culvert

2 On basis of material used:-

- 2.1 Concrete
- 2.2 Steel
- 2.3 Plastic
- 2.4 Aluminum
- 2.5 High density polyethylene

III. CASES TO BE SOLVED

For the purpose of design, culverts are subjected to following cases:-

Case-1:Dead Load, Live Load and Earth Pressure Acting from Outside, no Water Pressure Acting from Inside.

Case-2:Dead Load, Live Load and Earth Pressure Acting from Outside, Water Pressure Acting from Inside.

Case-3:Dead Load and Earth Pressure Acting from Outside, no Water Pressure Acting from Inside.

IV. PARAMETERS USED

- 1 Plate thickness= 0.30m
- 2 Length =10.50m
- 3 Width =3.80m
- 4 Flared width= 1.05m
- 5 Support= Fixed Type
- 6 Live Load on top slab= 6420kg/m²
- 7 Earth Pressure Load from bottom slab= 7860kg/m²
- 8 Earth Pressure Load on side walls= 1900-4180kg/m²(case 2)
- 9 Earth pressure Load on side walls= 400-2280kg/m²(case 3)
- 10 Water pressure Load on inside side walls= 0-3800kg/m²
- 11 Coefficient of Active Earth pressure = 1/3
- 12 E= 2.17185e+007
- 13 Poisson= 0.17
- 14 Density = 25
- 15 Damping=0.05
- 16 Strength FCU = 25000

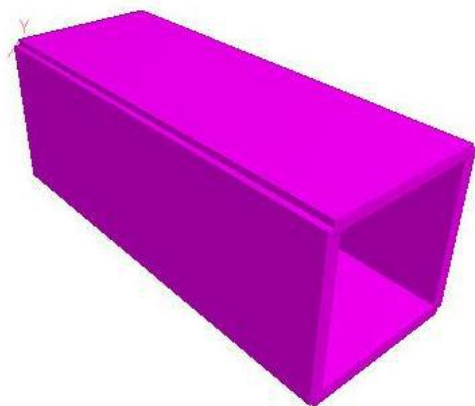


Fig.1: 3-D View of Flared Box Culvert

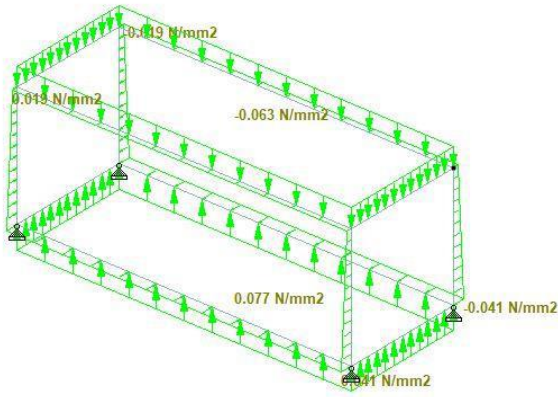


Fig.2: Case -1 of Box Culvert

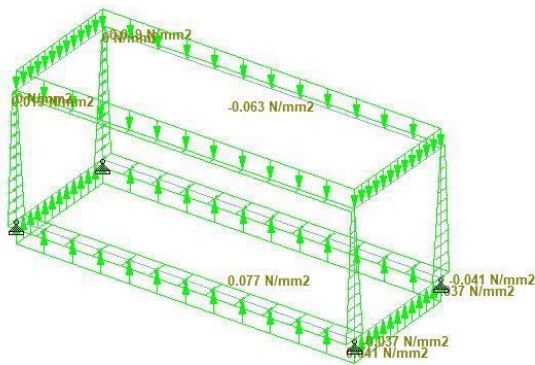


Fig.3: Case -2 of Box Culvert

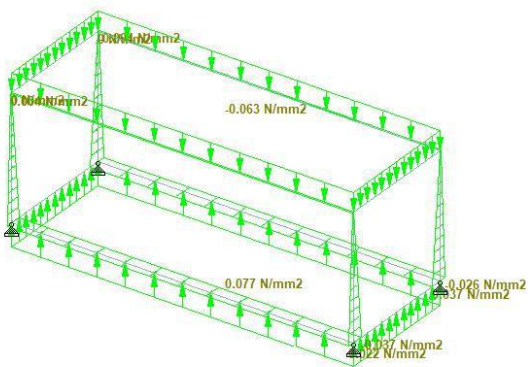


Fig.4: Case-3 of Box Culvert

V. RESULT AND DISCUSSIONS

1. PRINCIPAL TOP values declined in case 1 by 49.36% when there is an increase of flared portion from 0mm to 70mm.
2. PRINCIPAL TOP values declined in case 2 by 71.36% when there is an increase of flared portion from 0mm to 70mm.
3. PRINCIPAL TOP values declined in case 3 by 95.80% when there is an increase of flared portion from 0mm to 70mm.
4. TRESCA values declined in case 1 by 25.75% when


there is an increase of flared portion from 0mm to 70mm

5. TRESCA values declined in case 2 by 37.97% when there is an increase of flared portion from 0mm to 70mm
6. TRESCA values declined in case 3 by 52.55% when there is an increase of flared portion from 0mm to 70mm
7. VONMISSE values declined in case 1 by 30.62% when there is an increase of flared portion from 0mm to 70mm
8. VONMISSE values declined in case 2 by 40.81% when there is an increase of flared portion from 0mm to 70mm
9. VONMISSE values declined in case 3 by 49.24% when there is an increase of flared portion from 0mm to 70mm.

Detailed values are described in tables shown below:-

Table.1: For Analysis of Principle Top in Box Culvert

FLARED PORTION	PRINCIPAL TOP(KN/MMSQ)		
	C1	C2	C3
0MM	4.147	4.19	4.243
10MM	2.185	2.185	0.179
20MM	2.171	1.228	0.179
30MM	2.157	1.221	0.178
40MM	2.142	1.215	0.178
50MM	2.128	1.208	0.178
60MM	2.114	1.201	0.178
70MM	2.1	1.2	0.178

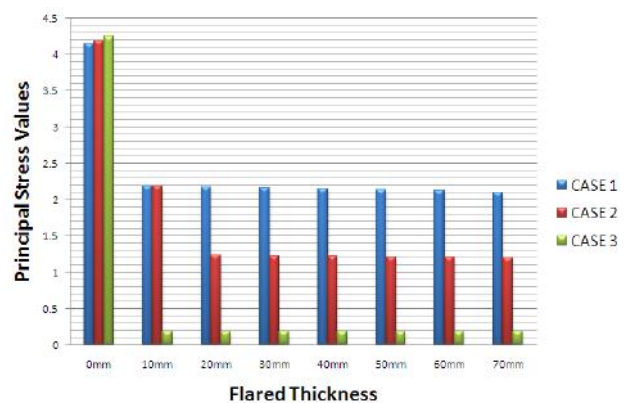


Graph 1- Principle Stress Values v/s Flared Thickness

Table.2: For Analysis of Tresca in Box Culvert

FLARED PORTION	TRESCA IN (KN/MMSQ)		
	CASE1	CASE2	CASE3
0MM	6.519	6.125	5.67
10MM	4.983	4.983	2.738
20MM	4.959	3.866	2.728
30MM	4.936	3.849	2.719
40MM	4.913	3.832	2.71

50MM	4.891	3.816	2.701
60MM	4.867	3.8	2.69
70MM	4.84	3.8	2.69


- Principal stress declined and gave a positive response for structural change.
- Tresca values also dropped.

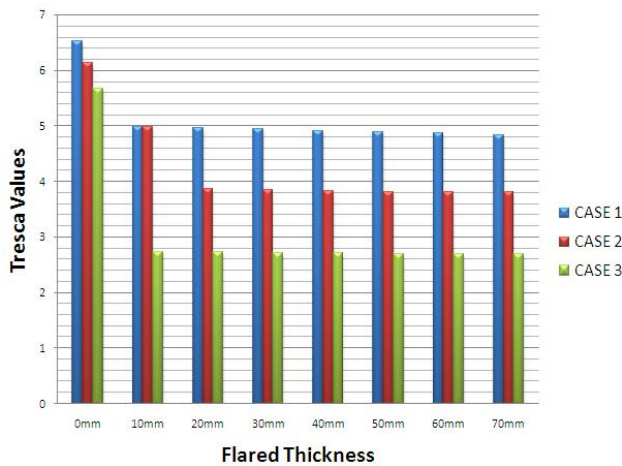

Graph.2: Tresca Values v/s Flared Thickness

Table.3: For Analysis of Von miss in Box Culvert

FLARED PORTION	VONMISS IN (KN/MMSQ)		
	CASE1	CASE2	CASE3
0MM	6.054	5.689	5.266
10MM	4.326	4.326	2.717
20MM	4.306	3.423	2.709
30MM	4.286	3.409	2.7
40MM	4.266	3.395	2.691
50MM	4.246	3.381	2.682
60MM	4.227	3.367	2.673
70MM	4.2	3.367	2.673

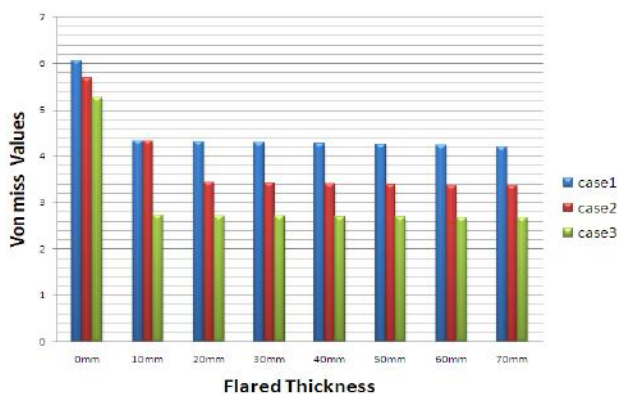

Graph.3: Von miss Values v/s Flared Thickness

VI. CONCLUSION

- By usage of Staad pro software analysis of structure was thoroughly done.
- Shear values decreased on increment of flared portion.
- Vonmiss values decreased very fast and remained constant on further increment of thickness.

ACKNOWLEDGEMENTS

I extend my deepest gratitude to **Mr. Sagar Jamle, Asst. Prof.,** Department of Civil Engineering, Oriental University, Indore, (M.P.) for providing all the necessary facilities and feel thankful for his innovative ideas, which led to successful completion of this work.

REFERENCES

- NehaKolate, Molly Mathew, Snehal Mali(2014),Analysis and Design of RCC Box Culvert,ISSN2229-5518, Vol.05, Issue 12
- A. C. Lande, K. Kamane, A.Mahadik(2015),Finite Element Analysis of Box Culvert, ISSN2319-5347,Vol. 04,Issue 01.
- A. D. Patil, A. Galatage (2016), Analysisof Box Culvert under Cushion Loading,ISSN(Print) 2394-1588, Vol. 03, Issue 06.
- Ajay R Polra, Prof. S. P. Chandresha, Dr. K. B. Parikh(2017),A Review Paper on Analysis and Cost Comparison of Box Culvert for Different Aspect Ratio of Cell, ISSN: 2231-5381, Vol. 44, Issue 03.
- Mr. AfzalHanif Sharif(2016), IJSDR,Review Paper on Analysis and Designof Railway Box Bridge, ISSN: 2455-2631,Vol.01, Issue 07.
- Shivan and Tenagi, Shreedhar(2015),Comparative Study of Slab Culvert Design Using IRC 112:2011 and IRC 21:2000,ISSN(Online): 2321-0613, Vol. 03, Issue 05.
- Ketan Kishor Sahu, Shraddha Sharma (2015),Comparison and Study of Different Aspect Ratio of Box Culvert, ISSN(Online): 2321-0613, Vol. 03, Issue 07.
- Mahesh D. Kakade, Rajkuwar A. Dubal (2017),A Study of Behavior of RCC Box Culvert under the Influence of Static and Dynamic Loads in Accordance with IRC,ISSN: 2395-0056, Vol. 04 Issue: 10.