

Integration Readiness levels Evaluation and Systems Architecture: A Literature Review

Gabriel T. Jesus, Milton F. Chagas Jr.

Instituto Nacional de Pesquisas Espaciais (INPE), Brazil

Abstract— *The success of complex systems projects is strongly influenced by their architecture. A key role of a system architect is to decide whether and how to integrate new technologies in a system architecture. Technology readiness levels (TRL) scale has been used for decades to support decision making regarding the technology infusion in complex systems, but it still faces challenges related to the integration of technologies to a system architecture. Integration Readiness Levels (IRL) scale has been elaborated in the last decade to face these challenges, representing the integration maturity between the technological elements of a system. The aim of this theoretical article is to perform a literature review on IRL scale evaluation and on systems architecture, through bibliographic research. Results show the review organized in five topics that surrounds the research objective, presenting the IRL and TRL scales evolution, comparing their evaluation practices, and exploring the architecture complexity of systems. Suggestions for future research are proposed based on these results.*

Keywords— *Integration Readiness Levels, systems architecture, systems integration, system readiness assessment, Technology Readiness Levels.*

I. INTRODUCTION

Systems architecture has strong influence on the success or failure of complex systems (Maier & Rechtin, 2000), and one of the key roles of a system architect is to decide whether and how to integrate new technologies in a system architecture (Crawley, Cameron, & Selva, 2016). Complex Products and Systems (CoPS) are defined (Hobday, 1998) as high cost and engineering intensive products, systems, networks and buildings.

The Technology Readiness Levels (TRL) scale was developed to support decision making in relation to the introduction of technologies during the development of complex systems (Mankins, 2009). Although this scale has been used for decades, it does not reflect well the integration of technological elements into the system architecture, and its application has other challenges related to system complexity, project planning, subjectivity and imprecision of the scale (Olechowski, Eppinger, & Joglekar, 2015).

In the space systems industry, the current global scenario presents notable factors such as intense technological innovation, growing globalization, entrepreneurship, proliferation of increasingly smaller satellites, and product modularization (Futron, 2014). Many techniques used for space systems development were conceived at the time of the space race, where the projects had large budget and greater continuity in planning (D. Hastings, 2004; Ross, Hastings, Warmkessel, & Diller, 2004). Given the current scenario of greater technological, commercial, political and application uncertainties, space-system architectures must face such uncertainties (D. E. Hastings, Weigel, & Walton, 2003), and technology readiness assessment methodologies should be updated (Olechowski et al., 2015).

The Integration Readiness Levels (IRL) scale was proposed to represent the maturity of the integration between technological elements of a system (Sausser, Verma, Ramirez-Marquez, & Gove, 2006) and has been evolving over the last decade.

The objective of this research is to perform a literature review on IRL scale evaluation and systems architecture. The literature review aims to compare the incipient IRL evolution and evaluation practices to the more consolidated TRL literature, and to explore the systems complexity environment where both scales are used, by reviewing concepts related to systems architecture, integration and their representation.

II. METHODOLOGY

Research methodology consisted in bibliographic research with qualitative analysis, comprising five topics. The first topic presents the TRL scale fundamentals and current limitations. In the second topic, the IRL scale is analyzed through an historical perspective and according to topics of interest for this research. The third topic presents methodologies and best practices related to TRL assessment process and the equivalent IRL assessment process. The fourth topic presents concepts about systems architecture and integration. The last topic shows selected concepts about the representation of dependencies in complex systems.

III. RESULTS AND DISCUSSION

3.1 TECHNOLOGY READINESS LEVELS

According to Mankins (2009), in the 1970s the National Aeronautics and Space Administration (NASA) introduced the concept of Technology Readiness Levels (TRL) as an interdisciplinary scale to allow better assessment and communication related to new technologies development.

The main objective of the TRL scale is to assist the decision making regarding technology infusion in complex systems development. When a technology is not mature enough, its introduction in a system under development may lead to deviations in the project schedule, budget and performance (GAO, 1999; Mankins, 2009; Olechowski et al., 2015).

The TRL scale was modified during its decades of existence. The scale was originally conceived to assist the transition from technology development projects to space missions development (Sadin, Povinelli, & Rosen, 1989). In 1995, TRL scale was strengthened by a NASA publication (Mankins, 1995) which detailed each technology readiness level definition and provided TRL application examples. This latest version of the TRL scale considers nine discrete levels (1 to 9), where higher TRL ratings relate to more mature technologies.

In the United States, Government Accountability Office (GAO) in 1999 recommended to the Department of Defense (DoD) to adopt the NASA TRL scale or similar scale to improve the research and development results (GAO, 1999). The DoD adopted the TRL scale with some changes to the original version (DoD, 2011). Also the Department of Energy (DOE) adopted the TRL scale with major modifications to the original version (DOE, 2015). In the 2000s, the TRL scale began to be used in space programs from other regions such as Europe and Japan (Mankins, 2009). In 2013, the ISO 16290 standard "Space systems - Definition of the Technology Readiness Levels (TRLs) and their criteria of assessment" (ISO, 2013) was published. This standard was proposed by European Cooperation for Space Standardization (ECSS, 2017a) and discussed at international level by the International Organization for Standardization (ISO) committee members.

According to ECSS (2017a), the TRL scale proposed in ISO 16290:2013 (ISO, 2013) standard presents some differences to the original TRL scale (Mankins, 1995), which are: Level 5 is a new intermediate level defined when subscale breadboards are used; level 6 is equivalent to the original TRL level 5; level 7 is equivalent to the original TRL level 6; The original level 7 relates to system prototype demonstration in space environment and is not defined by the ISO 16290:2013 (ISO, 2013) TRL scale.

According to Cornford and Sarsfield (2004), the TRL scale is focused on a particular technology evaluation, and significant integration challenges may occur when a technology is included in a space system. So even that the technology is mature, using this technology in new applications may be challenging, and the TRL scale usually does not represent the challenge of integrating the technology in a space system.

Olechowski, Eppinger and Joglekar (2015) investigated the use of the TRL scale in different industrial sectors through interviews and analyzes on industry standards and organizational guidelines. These authors (Olechowski et al., 2015) found that the TRL scale is widely used in different complex systems industries and identified fifteen challenges to improve the TRL scale utilization, categorized in three topics: system complexity, planning and review, and assessment validity.

Subsequently, Tomaschek, Olechowski, Eppinger and Joglekar (2016) conducted a survey with TRL scale practitioners in different industries worldwide to identify, among the fifteen identified challenges, which were the most priority challenges. The survey results show that the four highest priority challenges are related to the systems complexity, and they are: representation of the integration between technologies, interfaces maturity, modifications in the system and system overall maturity.

3.2 INTEGRATION AND SYSTEM READINESS LEVELS

Research initiated at the Stevens Institute of Technology, led by the researcher Brian J. Sauser, proposed two new readiness levels scales (Sauser et al., 2006) to complement the TRL scale, as options to overcome the TRL scale challenges related to the systems complexity, the same challenges identified by Tomaschek et al. (2016). The two new scales proposed were: Integration Readiness Levels (IRL) and System Readiness Levels (SRL).

The research about the integration maturity between components in a system is also justified by the fact that failures of many space systems are related to the integration of components (Sauser, Reilly, & Shenhar, 2009).

For Sauser, Ramirez-Marquez, Henry and DiMarzio (2008), technology integration is part of the systems engineering effort and demands a quantitative assessment tool to evaluate the risk of technology integration in a complex system.

Sauser, Gove, Forbes and Ramirez-Marquez (2010) consider the systems integration definition proposed by Buede (2000), as the aggregation process from components that need to be aggregated from the system configuration items. Sauser, et al. (2010) also consider the integration process as the upward slope in a "V" model

commonly used in systems engineering. Subsequently, the scale was modified to also represent the architecture definition activities, the downward slope in "V" model in systems engineering.

Sauser, et al. (2010) propose that the IRL scale should be able to be applied to different hierarchical levels from configuration items to the system level, and that the scale should represent the integration in sufficiently general terms, but specific enough to be useful. Sauser, et al. (2010) suggested that scales have been extensively used to support the integration between components in the computer industry, but scales to support more general systems integration are less developed.

The first version of the IRL scale (Sauser et al., 2006) was designed using the International Standards Organization's Open Systems Interconnect (ISO / OSI) scale, used in computer networks, which represents data integration levels in a particular interface between one or more systems. The first version of the IRL scale had seven readiness levels, based on the ISO / OSI scale.

Sauser, et al. (2010) included two new levels to the IRL scale, when compared to the original IRL version (Sauser et al., 2006). The two new levels were: Level 8 related to qualification through testing and demonstration and Level 9 related to the successful operation in a mission.

Further, the IRL scale was modified to better reflect the systems development process and to be more consistent with the fundamentals of TRL scale (Austin & York, 2015, 2016).

The IRL scale is commonly assessed using a Design Structure Matrix (DSM) to represent the integration between the system components (Olechowski et al., 2015).

The System Readiness Levels scale, or SRL, was proposed to quantify the readiness level of a component in relation to the other components that constitute a system, and indicate how much the whole system is integrated (Sauser, Ramirez-marquez, & Tan, 2008). Equation 1 (Austin & York, 2015) shows the composite SRL calculation for a system with 'N' components, where the matrix $[SRL]_{Nx1}$ is obtained by multiplying the matrix $[IRL]_{NxN}$, which represents the integration readiness levels between the 'N' components, and the matrix $[TRL]_{Nx1}$, which represents the technology readiness levels for each of the 'N' components. The SRL of the overall system can be obtained by the normalized average of the elements of the matrix $[SRL]_{Nx1}$.

$$[SRL]_{Nx1} = [IRL]_{NxN} \times [TRL]_{Nx1} \quad (1)$$

The SRL scale can be transformed in a scale of discrete numbers comprising certain calculated SRL intervals (Austin & York, 2015, 2016).

Other applications proposed for the IRL and SRL scales, together with TRL scale, are: use the readiness levels as a baseline coupled to a earned value management system for project management (Magnaye, Sauser, Patanakul, Nowicki, & Randall, 2014); system development planning and system development costs minimization (Magnaye, Sauser, & Ramirez-Marquez, 2010); and the association with effectiveness metrics for systems design, such as the Equivalent Mass System (Sauser & Magnaye, 2010).

The IRL scale is being used in the aerospace industry (Sauser, Long, Forbes, & McGrory, 2009), and customized to reflect the system integration process for oil and gas exploration (Knaggs et al., 2015, 2017, Yasseri, 2013, 2016).

Other papers communicate the experience evaluation about using the IRL scale (Atwater & Uzdinski, 2014; Baiocco et al., 2015; Knaggs et al., 2017; Lemos & Chagas Jr., 2016; London, Holzer, Eveleigh, & Sarkani, 2014; Mantere, 2014; Mantere & Pirinen, 2014; Mapamba, Conradie, & Fick, 2016; Mcconkie, Mazzuchi, Sarkani, & Marchette, 2013; Pirinen, 2014; Sivlen & Pirinen, 2014).

Kujawski (2013) criticized the SRL scale, with the argument that the scale is a product between two ordinal numbers, which represent the TRL and IRL scales, and its results should be analyzed with caution. Jimenez and Mavris (Jimenez & Mavris, 2014) criticized the IRL scale, at the time that the IRL scale was based on the ISO / OSI data integration scale, proposing that the scale was very specific to the data management effort, and suggested to use only the TRL scale. However, the IRL scale has evolved to address this criticism.

The International Systems Readiness Assessment Community of Interest (ISRACOI, 2018) is a worldwide collaborative community of researchers, practitioners and stakeholders interested in system readiness metrics such as TRL, IRL and SRL. New researches and white papers are published in the ISRACOI website (2018).

3.3 TECHNOLOGY READINESS ASSESSMENT

According to Mankins (2009), key factors for effective use of the TRL scale are: to perform objective and well documented assessments for the readiness and risks about the technology under evaluation; and perform the assessments at critical decision making milestones in the complex system development project. Mankins (2009) proposed the concept of Technology Readiness Assessment (TRA) as a methodology used to conduct the TRL scale evaluation process. For Mankins (2009), a rigorous TRA should include clear evidences that the declared TRL was achieved - such as photos of a breadboard in the laboratory, quantitative data verification tests, among other evidences.

The main methodologies used to perform a TRA have been qualitative analysis from experts to establish the adequate TRL level, and analysis supported by structured interviews and quantitative methods (Hueter & Tyson, 2010). These quantitative methods may be supported by probability and statistics analyses (Ristinen, 2010). Bayesian networks may also be applied to calculate the most adequate TRL level (Austin et al., 2017).

Air Force Research Laboratory (AFRL) developed an automated tool (Nolte, Kennedy, & Dziegiel, 2003) to structure the TRL assessment interview and quantify the TRL level more appropriate to the responses. The questionnaire presents questions regarding the level of knowledge about the technology and its potential customers, about the technology development documentation, future aspects of integration, modeling and simulation, verification and system environment where the technology might be infused. According to these authors (Nolte et al., 2003), the main application envisioned for the TRL scale in this case was to guide the transition from technology development programs to the technology use in operational systems.

Similarly, the Jet Propulsion Laboratory (JPL) developed a TRA process (Frerking & Beauchamp, 2016) based on NASA's recommendations. This process contains a questionnaire based on a previous questionnaire proposed by Bilbro (2009).

Cornford and Sarsfield (2004) argue that: the TRL assessment techniques at that moment were qualitative; and that the importance of the language and culture involved in the technology transfer process between laboratories and their integration in space systems was generally underestimated. In this way, the TRL assessments were subjective due to factors such as: the team carrying out the assessment was usually the same development team and not a third party with more impartial view; the original settings of the TRL scale could be interpreted in different ways; even though quantitative methods were used, the database was still subjective due to limitations in the TRL scale definitions objectivity.

A list of supporting information for each TRL level was developed by the DoD (2011) in order to make more objective assessments, containing information related to systems engineering, verification, technical requirements and circumstances relevant to each TRL level.

The ISO 16290:2013 standard (ISO, 2013) presents a list with the work performed and documented as evidences required to achieve each level TRL. This list of evidences presents predominantly elements of space systems verification discipline, accompanied by their respective performance requirements and technology definition documents (ECSS, 2017a).

GAO (2016) published a preliminary report in order to establish a methodology based on best practices that could be used by the USA federal government to perform technology readiness assessments (TRA), aiming mainly to support decision making on programs and projects which involve large commitments of financial resources. Some of the TRA best practices described in this document (GAO, 2016) are:

- The responsible for the TRA should understand which evidences would be needed for the TRL scale and understand the operational environment in which the technology should operate, depending on whether the assessment is performed to meet government agencies requirements or it is performed as an internal exercise to monitor the technology readiness;
- Reliable assessments are supported by artifacts and clear information, such as requirements documents, analyzes, test reports and environmental testing considerations;
- Supporting information and evidence needed for each TRL level are best practices. They are not exhaustive and may vary according to the technology or application, so it is necessary to adapt these definitions to better reflect the technology and its application;
- The quality of a TRA depends on the accuracy and relevance of the artifacts, test data, analysis reports, and other supporting information. This information can be dependent on other technologies or activities that are outside the assessment scope, but may need to be included to better assess the technology readiness. Changes or refinements in requirements, technology parameters or other factors may affect the TRA, in which case the TRA should be updated.

ECSS published the handbook ECSS-E-HB-11A "Technology readiness level (TRL) guidelines" (ECSS, 2017a) as a guide to the TRL scale application in space missions and programs, offering guidelines for the interpretation of the TRL scale and best practices related to the technology readiness assessment process. ECSS adopted the ISO 16290: 2013 (ISO, 2013) standard for the TRL scale definition.

Regarding the IRL scale, Sauser, et al. (2010) established decision criteria to support the assessment for each IRL level. The criteria were based on two sources. The first source was the evaluation of standards, researches and other documents related to systems engineering and acquisition processes (such as DoD 5000.02, INCOSE Systems Engineering Handbook, IEEE 15288, NASA Systems Engineering Handbook). The second source was based on discussions and interviews with experts in the areas of systems engineering, project management and procurement management, to assess what would be the

most important decision criteria for each IRL level. As integration is a complex topic, Sauser, et al. (2010) recommended that future researches could continue to review and modify the decision criteria list and their relative importance.

Austin and York (2015, 2016) presented the latest version of the IRL scale. A column in the IRL scale presents the required evidences for each level, incorporating the most relevant criteria identified by Sauser, et al. (2010) and including data integration testing particularities.

The list of required evidences for the IRL scale presents a potential improvement opportunity (Jesus & Chagas Jr, 2017) for its definition, when compared to how the list of required evidences for the TRL scale is structured in the ISO 16290:2013 (ISO, 2013) standard.

The integrated process for assessing the TRL, IRL and SRL scales is defined as the System Readiness Assessment (SRA) (Austin & York, 2015, 2016). A system mapping provides an understanding of the relationships between the different architecture layers. The highest hierarchical level of this mapping is based on operational requirements and activities. Then the functions supporting these operational activities are mapped. After that, the system components that perform these functions are identified. In turn, the components are composed by technologies. Connection diagrams between the components help to understand the system architecture and integration. Fig. 1 illustrates an example of SRA application (Austin & York, 2015).

Operational Activities	Service Functions (Level 1)	Service Functions (Level 2)	System Components	TRL	System Technologies	TRL
A2.1.1 Activity A2.1.2 Activity A2.1.3 Activity A2.1.4 Activity A2.1.6 Activity A2.2.1 Activity A2.2.2 Activity	1. Service Function	1.1 Service Function	Component 1	4	System Technology System Technology System Technology	5 5 4
			Component 2	4	System Technology System Technology System Technology	6 4 7
			Component 3	5	System Technology System Technology System Technology	5 7 5
			Component 4	7	System Technology System Technology	6 7
A2.2.3 Activity A2.2.4 Activity A2.2.5 Activity		1.2 Service Function				

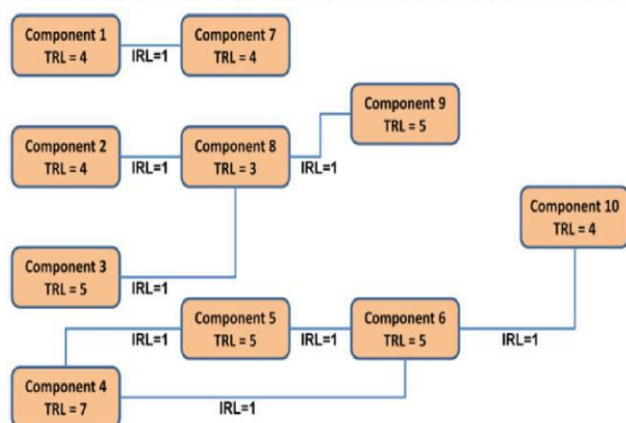


Fig.1: Example of System Readiness Assessment application.

Source: Austin and York (2015), which is published under a CC BY-NC-ND license (Creative Commons, 2018).

3.4 COMPLEX SYSTEMS ARCHITECTURE AND INTEGRATION

Hobday (1998) defined Complex Products and Systems (CoPS) as high cost and engineering intensive products, systems, networks and buildings. CoPS tend to be manufactured in single projects or in small batches and the production emphasis tends to be on design, project management, systems engineering and systems integration. Examples of CoPS include satellites, telecommunications networks, flight simulators, aircraft engines, avionics systems, train engines, air traffic control units, electrical network systems, offshore oil equipment, intelligent buildings and telephone network equipment. Due to its high cost and customization features, the dynamics of innovation and the nature of the industrial coordination are different in relation to other types of products, especially the low cost, mass-produced, and based on standard components.

Hobday, Davies and Prencipe (2005) suggested that systems integration became an essential capability for modern corporations. Many major global companies are developing a new industrial organization model based on systems integration. Instead of performing all the productive tasks in-house, companies are building capabilities to design and integrate systems, while managing networks of component and subsystem suppliers. In this sense, systems engineering and project management disciplines are needed to coordinate the technical and organizational effort required for systems integration (Eisner, 2008).

Some applications of readiness scales for system integration are: analyze the depth of systems integrators technology base (Chagas Jr., Leite, & Jesus, 2017), categorize (Lemos, 2016; Shenhar et al., 2005) and support (Jesus & Chagas Jr., 2016) CoPS development projects, and apply to a technology vigilance system (Andrade, Silva, Chagas Jr., Rosa, & Chimendes, 2017). Eisner (2005) identified in the literature factors that contribute to greater complexity of systems, which were: size, number of functionalities, parallel versus serial operation, number of operating modes, duty cycle (dynamic versus static), real-time operations, very high performance level, number of interfaces, different types of interfaces, degree of integration, non-linear behavior and human-machine interaction. Regarding the different types of interfaces, many systems have a simple mechanical and electrical interface, as connecting stereo components and connecting a cable to a DVD player, VCR or TV set, but if we add for example thermal,

environmental interface requirements, data structure and protocols, the system becomes more complex.

Blanchard and Fabrycky (2006) proposed the following main system life cycle phases: Conceptual Design, Preliminary Design, Detail Design and Development, Production/Construction, Operational use and system support, Retirement. The activities of testing, evaluation and validation of the system are progressively carried out throughout its development.

According to Blanchard and Fabrycky (2006), models are created to represent a system under study and can be classified as physical, analogue, schematic, and mathematical types. Physical models look like what they represent, analogue models behave like the system, schematic models describe graphically a process or situation, and mathematical models represent symbolically the principles of a situation under study. During the early phases of detail design, breadboards, bench-test models, engineering models, engineering software, and service test models are built aiming to verify specific performance or physical design characteristics. Formal tests and demonstrations are carried out during the latter activities of the detailed design phase when pre-production prototype equipment, software, and similar formal procedures are available.

Also, according to Blanchard and Fabrycky (2006) the basic architecture of the system is established with the definition of system operational requirements, the concept of maintenance and support and the identification and prioritization of technical performance measures (TPMs). A system architecture represents the system high-level design or configuration, its operational interfaces, anticipated usage profiles (mission scenarios) and the environment in which it must operate, describing how these various requirements should interact for the system. Next, the functional architecture describes the system in functional terms. From this analysis, through the requirements allocation process and the definition of the various resource requirements necessary for the system to reach its mission, the physical architecture is defined.

Maier and Rechtin (2000) proposed that the progressive refinement of the design is one of the most basic patterns for the engineering practice. The process of systems architecting is performed through the progression, or gradual reduction of the abstraction, modeling, evaluation criteria, heuristics and purposes, from the initial ideas up to reach the most formal and detailed processes in different fields of engineering. Thus, the evolution and development of models are threatened as the core process of systems architecting. The models represent and control the system specification, its design and its production plan. Even after the system delivery, the modeling will be the mechanism to evaluate the system behavior and plan its evolution.

Rechtin (2000) proposed that decisions related to the evolution or creation of new system architectures influence directly the competitiveness of organizations to meet the demands of their customers, and therefore influence directly the success of these organizations.

Regarding the product development process, Ulrich and Eppinger (2012) proposed that product architecture is the allocation of functional elements to physical elements of the product. The purpose of the product architecture is to define the basic building blocks of the system physical elements in terms of what they do and what are their interfaces with the rest of the product. After completing the architecture definition, it is possible to perform the detailed design and testing of these building blocks, allocate them to teams or suppliers, so that the development of different parts of the product could be done simultaneously. Decisions on the product architecture and modularity influence directly important aspects of the organization success, such as future changes in the product range, components standardization, product performance, manufacturing, and product development management (Ulrich, 1995; Ulrich & Eppinger, 2012).

Crawley, Cameron and Selva (2016) proposed that a simple definition for system architecture is the abstract description of the system entities and the relationships between them, and proposed that in systems engineering the architecture can be represented as a set of decisions. These authors (Crawley et al., 2016) proposed that system architecting is a composition of science and art, with the rationalization of decisions through the formulation of how these decisions can impact the system performance. These authors (Crawley et al., 2016) also suggested that the system architecture can be used to map and analyze an existing system, in a reverse engineering method, or be used in the synthesis of a new system, in a direct engineering method.

Crawley, Cameron and Selva (2016) considered that a new technology is often at the heart of a new product, and a change in the technology is often a major motivation for a new architecture development. So, according to these authors (Crawley et al., 2016), one of the key roles of the system architect is to decide whether and how to infuse a new technology into a system architecture. This infusion would require deep knowledge of the available technology and its maturity, the process to integrate the technology into the system, and the value that this integration would create. Still according to these authors (Crawley et al., 2016), the TRL scale is useful to support system architects to take these decisions.

Ross, et al. (2004) and Hastings (2004) suggested that many techniques to support space systems development were conceived during the space race, where the projects had large budgets and great planning continuity.

Nowadays, in addition to face the technical challenges in building such complex systems, engineers must also deal with changes in the political and economic context that influence the design and development of space systems.

Hastings, et al. (2003) proposed that decisions in system architectures should help to address these uncertainties, with a focus on strategies such as flexibility and robustness that can lead designers to different optimization solutions to meet specifications or other specific criteria.

Crawley, et al. (2004) suggested that system architectures are not static, but they evolve for long periods as technologies mature. They also evolve during the natural process of designing a system. These evolutionary patterns are useful for understanding the importance of the representation and the decisions involved in a system architecture.

In line with the previously described context that systems and their architectures face, Olechowski, Eppinger and Joglekar (2015) proposed that is important to update the TRL scale application methods. The argument is that since the current context of growing systems complexity, greater dynamics of innovation, the current use of TRL in decision-making and the current use in different organizational processes, are significantly different from the context experienced by NASA in the 1970s when the original TRL scale was created.

Regarding the definition for systems integration, the systems engineering literature and standards propose a common notion for systems integration as the process of assembling and integrating elements of smaller hierarchical levels, successively into larger hierarchical levels, until the system and its desired functionalities are realized (Buede, 2000; DoD, 2017; ECSS, 2017b; IEEE, IEC, & ISO, 2007; INCOSE, 2006; Kossiakoff, Sweet, Seymour, & Biemer, 2011; NASA, 2017; Peterson & Rodberg, 2005). The ISO / IEC 26702-2007 IEEE 1220-2005 "Standard for Systems Engineering - Application and Management of the Systems Engineering Process" (IEEE, IEC & ISO, 2007) added that to perform the integration of elements into a system, the design and interface logic of these elements must be met.

For Sage and Lynch (1998), the integration of technical parameters and interface compatibility are generally assumed as a technical effort carried out during the latter parts of the system development lifecycle. However, if this effort is not planned properly in the definition phases and in the early parts of the development phase, integration is likely to be difficult at the end of the development phase. To perform concurrent engineering and simultaneously develop different parts of the system, initial efforts must be made in system architecture and system partitioning, and then an explicit system integration stage is required.

In this way, Sage and Lynch (1998) suggested that if we consider that the activities of analysis, definition, design, requirements and control of interfaces are all integration efforts, then the system integration occurs at almost every stage of the systems development lifecycle, not just in its later stages.

In his proposal for a general system integration theory, Langford (2013) proposed that integration is the approach of building or creating a whole from parts, and is more than simply combining or assembling these parts. Many system integration efforts undergo changing requirements for many reasons, and while there are numerous strategies for solving these system integration problems, it is time consuming to plan and integrate any part of the system as part-by-part, because the problems persist (Ramamoorthy, Chandra, Kim, Shim, & Viji, 1992). The integration concept proposed by Langford (2013) expresses integration of artifacts as "part-to-all-expected" rather than "part-to-part". For example, to integrate parts A and B to reach system C: Plan and integrate Part A in the way that system C should behave, and then Part B in the way that system C should behave, is more effective than integrating Part A to Part B to reach system C. If Part A is not available, Part B can still be integrated with the behaviors of C to show how Part A would (and should) behave. According to this author (Langford, 2013), the application of this "part-to-all-expected" system integration concept illustrates the power of thought and theoretical planning, that is, most situations that need to be addressed during integration planning could be threatened regardless of the individual parts situation.

Zandi (1986) suggested that science and engineering should make use of systemic thinking, considering that a system is more than the sum of its parts, possessing emergent properties. Crawley, Cameron, and Selva (2016) proposed that emergence refers to what appears, materializes, or surfaces when a system operates, or in other words the functions that emerge when a system operates. Emerging functions can be classified as desired or undesirable, and anticipated or unanticipated (Crawley et al., 2016). Sillitto (2005) proposed that systems engineering could be defined as the management of emerging properties, such as the importance of emerging properties in the management of a system.

3.5 REPRESENTATION OF DEPENDENCIES IN COMPLEX SYSTEMS

According to Browning (2016), the Design Structure Matrix (DSM), also called the dependency structure matrix, became a modeling framework widely used in many areas of research and practice. DSM has advantages of simplicity and conciseness in its representation and, supported by appropriate analysis, may also highlight important patterns in system architectures (design

structures) such as modules and clusters (Eppinger & Browning, 2012). DSM is a square matrix where diagonal cells normally represent the elements of the system and off-diagonal cells represent relations (such as dependencies, interfaces, interactions, etc.) between the elements.

Recent publications on the IRL scale use a DSM matrix to map the system architecture and perform the IRL evaluation (Olechowski et al., 2015).

The N-Squared (N2) diagram is also an widely used tool (Crawley et al., 2016; Lalli, Kastner, & Hartt, 1997; Larson, Kirkpatrick, Sellers, Thomas, & Verma, 2009; NASA, 2017). The diagram, in a matrix form, is used to represent the interfaces of a system. The components or functions of the system are placed diagonally, while the other cells in the NxN matrix represent the inputs and outputs of the interfaces, the outputs being represented in rows and the entries in columns. Alternatively, the interfaces may be represented without polarization, that is, without distinction between inputs and outputs. The N2 diagram may be applied at successively lower hierarchical system levels, and may also represent external interfaces to the system. The N2 diagram application is similar to the DSM (Eppinger & Browning, 2012).

IV. CONCLUSION

This paper presented a literature review on IRL scale evaluation and systems architecture, covering five topics that surrounded the main topics of interest.

The fundamentals of the TRL scale and its assessment methods were analyzed in order to understand the IRL origin and be able to compare both scales literatures. Systems architecture and systems integration concepts were presented in order to highlight the complexity of systems and explore the context where these scales are used. Selected concepts about the representation of dependencies in complex systems are shown in order to identify methodologies being practiced in the literature.

Through the literature review analysis, it is possible to suggest future researches about the IRL scale, such as: Evaluate the scale definition and the evidences needed for each level, towards a more discipline neutral approach, as the TRL assessment is being consolidated as interdisciplinary and relies on verification and documentation practices, and considering that IRL scale is evolving from a data integration focus to a multidisciplinary approach; Explore complementary methods to analyze the integration readiness through additional systems architecture analysis approaches, given that systems architecture is a vast topic, reflecting the complexity of systems; Analyze a system with multiple interface types between its elements is also a topic not yet explored in IRL scale literature.

This paper may support researchers and practitioners to better understand the IRL scale evolution, opportunities to the scale evaluation process, and IRL scale relations to the system architecture and integration concepts.

IRL scale complements TRL scale as a tool to support decision making in the development of complex systems. System architects need to decide whether and how to integrate new technologies in a system architecture, being the system architecture a critical factor for the system success.

REFERENCES

- [1] Andrade, H. S., Silva, M. B., Chagas Jr., M. F., Rosa, A. C. M., & Chimendes, V. C. G. (2017). Proposal for a technology vigilance system for a Technology License Office. *International Journal of Advanced Engineering Research and Science*, 4(10), 140–149. <https://doi.org/10.22161/ijaers.4.10.23>
- [2] Atwater, B., & Uzdinski, J. (2014). Wholistic Sustainment Maturity: The Extension of System Readiness Methodology across all Phases of the lifecycle of a complex system. *Procedia Computer Science*, 28, 601–609. <https://doi.org/10.1016/j.procs.2014.03.073>
- [3] Austin, M. F., Doolittle, E., Ahalt, V., Doolittle, E., Polacek, G. A., & York, D. M. (2017). Applying Bayesian Networks to TRL Assessments – Innovation in Systems Engineering. In *27th Annual INCOSE International Symposium (IS 2017)*. Adelaide, Australia: INCOSE.
- [4] Austin, M. F., & York, D. M. (2015). System Readiness Assessment (SRA) an Illustrative Example. *Procedia Computer Science*, 44, 486–496. <https://doi.org/10.1016/j.procs.2015.03.031>
- [5] Austin, M. F., & York, D. M. (2016). System Readiness Assessment (SRA) a Vade Mecum. In G. Auvray, J. C. Bocquet, E. Bonjour, & D. Krob (Eds.), *Complex Systems Design & Management: Proceedings of the Sixth International Conference on Complex Systems Design & Management, CSD&M 2015* (pp. 53–68). Cham, Switzerland: Springer International Publishing. https://doi.org/10.1007/978-3-319-26109-6_4
- [6] Baiocco, P., Ramusat, G., Sirbi, A., Bouilly, T., Lavelle, F., Cardone, T., ... Appel, S. (2015). System driven technology selection for future European launch systems. *Acta Astronautica*, 107, 301–316. <https://doi.org/10.1016/j.actaastro.2014.10.037>
- [7] Bilbro, J. (2009). Technology Assessment Calculator. JB Consulting International. Retrieved from http://www.jbconsultinginternational.com/Pages/IntegratedTRL_AD2Calculators.aspx

- [8] Blanchard, B. S., & Fabrycky, W. J. (2006). *Systems engineering and analysis* (4th ed.). Upper Saddle River, USA: Prentice-Hall.
- [9] Browning, T. R. (2016). Design Structure Matrix Extensions and Innovations: A Survey and New Opportunities. *IEEE Transaction on Engineering Management*, 63(1), 27–52. <https://doi.org/10.1109/TEM.2015.2491283>
- [10] Buede, D. M. (2000). *The engineering design of systems: models and methods* (1st ed.). New York, USA: John Wiley & Sons, Inc.
- [11] Chagas Jr., M. F., Leite, D. E. S., & Jesus, G. T. (2017). “Coupled processes” as dynamic capabilities in systems integration. *RAE-Revista de Administração de Empresas*, 57(3), 245–257. <https://doi.org/10.1590/S0034-759020170305>
- [12] Cornford, S. L., & Sarsfield, L. (2004). Quantitative methods for maturing and infusing advanced spacecraft technology. In *2004 IEEE Aerospace Conference Proceedings* (pp. 663–681). <https://doi.org/10.1109/AERO.2004.1367652>
- [13] Crawley, E., Cameron, B., & Selva, D. (2016). *System architecture: strategy and product development for complex systems*. Harlow, UK: Pearson.
- [14] Crawley, E., Weck, O. de, Eppinger, S., Magee, C., Moses, J., Seering, W., ... Whitney, D. (2004). The influence of architecture in engineering systems. In *MIT Engineering Systems Symposium* (p. 30). Cambridge, USA: MIT. Retrieved from strategic.mit.edu/docs/architecture-b.pdf
- [15] Creative Commons. (2018). Creative Commons - Attribution-NonCommercial-NoDerivatives 4.0 International - CC BY-NC-ND 4.0. Retrieved February 15, 2018, from <http://creativecommons.org/licenses/by-nc-nd/4.0>
- [16] Department of Defense - DoD. (2011). Technology Readiness Assessment (TRA) Guidance. Washington, USA: DoD. https://doi.org/10.1007/SpringerReference_24357
- [17] Department of Defense - DoD. (2017). Systems Engineering. DoD. Retrieved from <http://www.acq.osd.mil/se/pg/guidance.html>
- [18] Department of Energy - DOE. (2015). Technology Readiness Assessment Guide. Washington, USA: DOE. Retrieved from <https://www.directives.doe.gov/directives-documents/400-series/0413.3-EGuide-04-admchg1>
- [19] Eisner, H. (2005). *Managing Complex Systems: Thinking outside the Box*. Washington, USA: John Wiley & Sons. <https://doi.org/10.1002/0471745499>
- [20] Eisner, H. (2008). *Essentials of project and systems engineering management* (3rd ed.). Washington, USA: John Wiley & Sons.
- [21] Eppinger, S. D., & Browning, T. R. (2012). *Design Structure Matrix Methods and Applications*. Cambridge, USA: MIT Press.
- [22] European Cooperation for Space Standardization - ECSS. (2017a). ECSS-E-HB-11A - Technology readiness level (TRL) guidelines. Noordwijk, The Netherlands: ECSS.
- [23] European Cooperation for Space Standardization - ECSS. (2017b). ECSS-E-ST-10C Rev.1 - System engineering general requirements. Noordwijk, The Netherlands: ECSS.
- [24] Frerking, M. A., & Beauchamp, P. M. (2016). JPL technology readiness assessment guideline. In *2016 IEEE Aerospace Conference*. IEEE. <https://doi.org/10.1109/AERO.2016.7500924>
- [25] Futron Corporation. (2014). *FUTRON'S 2014 Space Competitiveness Index - a comparative analysis of how countries invest in and benefit from space industry*. Washington, USA.
- [26] Government Accountability Office - GAO. (1999). Better Management of Technology Development Can Improve Weapon System Outcomes. Washington, USA. Retrieved from <http://www.gao.gov/products/GAO/NSIAD-99-162>
- [27] Government Accountability Office - GAO. (2016). GAO Technology Readiness Assessment Guide: Best Practices for Evaluating the Readiness of Technology for Use in Acquisition Programs and Projects -Exposure Draft. Retrieved from <http://www.gao.gov/products/GAO-16-410G>
- [28] Hastings, D. (2004). Space System Architecture and Design. Massachusetts Institute of Technology: MIT OpenCourseWare. Retrieved from <https://ocw.mit.edu>
- [29] Hastings, D. E., Weigel, A. L., & Walton, M. A. (2003). Incorporating Uncertainty into Conceptual Design of Space System Architectures. In *INCOSE International Symposium* (Vol. 13, pp. 1380–1392). Washington, USA. <https://doi.org/10.1002/j.2334-5837.2003.tb02712.x>
- [30] Hobday, M. (1998). Product complexity, innovation and industrial organisation. *Research Policy*, 26(6), 689–710. [https://doi.org/10.1016/S0048-7333\(97\)00044-9](https://doi.org/10.1016/S0048-7333(97)00044-9)
- [31] Hobday, M., Davies, A., & Prencipe, A. (2005). Systems integration: A core capability of the modern corporation. *Industrial and Corporate Change*, 14(6), 1109–1143. <https://doi.org/10.1093/icc/dth080>
- [32] Hueter, U., & Tyson, R. (2010). Ares Project technology assessment - Approach and tools. *61st International Astronautical Congress 2010, IAC 2010*, 8, 6337–6347. Retrieved from <http://www.scopus.com/inward/record.url?eid=2->

- s2.0-79959479711&partnerID=40&md5=f08088368eda0df0d1a9f62c8d218128
- [33] Institute of Electrical and Electronics Engineers - IEEE, International Electrotechnical Commission - IEC, & International Organization for Standardization - ISO. (2007). ISO/IEC 26702-2007 IEEE 1220-2005 Standard for Systems Engineering - Application and Management of the Systems Engineering Process. Geneva, Switzerland: ISO/IEC/IEEE.
<https://doi.org/10.1109/IEEESTD.2007.386502>
- [34] International Council on Systems Engineering - INCOSE. (2006). INCOSE Systems Engineering Handbook v3. INCOSE.
- [35] International Organization for Standardization - ISO. (2013). Space systems - Definition of the Technology Readiness Levels (TRLs) and their criteria of assessment. Geneva, Switzerland: ISO.
- [36] ISRACOI. (2018). International Systems Readiness Assessment Community of Interest (ISRACOI). Retrieved January 8, 2018, from <http://www.isracoi.org>
- [37] Jesus, G. T., & Chagas Jr, M. F. (2017). A importância de práticas de verificação e validação no processo de avaliação de métricas de maturidade. In *8 Workshop em Engenharia e Tecnologia Espaciais - WETE*. São José dos Campos, Brasil. Retrieved from <http://mtc-m16d.sid.inpe.br/rep/sid.inpe.br/mtc-m19/2013/05.22.14.54>
- [38] Jesus, G. T. de, & Chagas Jr., M. de F. (2016). Identificação de ferramentas de apoio ao gerenciamento de sistemas espaciais. In *7 Workshop em Engenharia e Tecnologia Espaciais - WETE*. São José dos Campos, Brasil. Retrieved from <http://mtc-m16d.sid.inpe.br/rep/sid.inpe.br/mtc-m16d/2016/07.30.22.02>
- [39] Jimenez, H., & Mavris, D. N. (2014). Characterization of Technology Integration Based on Technology Readiness Levels. *Journal of Aircraft*, 51(1), 291–302.
<https://doi.org/10.2514/1.C032349>
- [40] Knaggs, M., Harkreader, D., Unione, A., Oelfke, J., Ramsey, J., Keairs, D., ... Atwater, B. (2017). Nesting in the evaluation of system readiness for complex systems of emerging technologies. In *2017 Annual IEEE International Systems Conference (SysCon)* (pp. 1–6). IEEE.
<https://doi.org/10.1109/SYSCON.2017.7934811>
- [41] Knaggs, M., Ramsey, J., Unione, A., Harkreader, D., Oelfke, J., Keairs, D., & Bender, W. (2015). Application of Systems Readiness Level Methods in Advanced Fossil Energy Applications. *Procedia Computer Science*, 44, 497–506.
<https://doi.org/10.1016/j.procs.2015.03.071>
- [42] Kossiakoff, A., Sweet, W. N., Seymour, S. J., & Biemer, S. M. (2011). *Systems engineering: principles and practice* (2nd ed.). Hoboken, USA: Wiley-Interscience.
- [43] Kujawski, E. (2013). Analysis and critique of the system readiness level. *IEEE Transactions on Systems, Man, and Cybernetics Part A: Systems and Humans*, 43(4), 979–987.
<https://doi.org/10.1109/TSMCA.2012.2209868>
- [44] Lalli, V., Kastner, R., & Hartt, H. (1997). Training Manual for Elements of Interface Definition and Control. Washington, USA: NASA. Retrieved from <http://www.hq.nasa.gov/office/codeq/rp1370.pdf>
- [45] Langford, G. O. (2013). *Toward A General Theory of Systems Integration: Research in the Context of Systems Engineering*. University of South Australia, Adelaide, Australia. Retrieved from <http://search.ror.unisa.edu.au/?redirect=http://research.outputs.unisa.edu.au/11541.2/117212>
- [46] Larson, W. J., Kirkpatrick, D., Sellers, J. J., Thomas, L. D., & Verma, D. (2009). *Applied Space Systems Engineering*. Hoboken, USA: McGraw-Hill.
- [47] Lemos, J. C. (2016). *Um modelo de avaliação de risco para projetos aeroespaciais*. Instituto Nacional de Pesquisas Espaciais - INPE, São José dos Campos, Brasil. Retrieved from <http://mtc-m21b.sid.inpe.br/col/sid.inpe.br/mtc-m21b/2016/03.03.15.55/doc/publicacao.pdf>
- [48] Lemos, J. C., & Chagas Jr., M. F. (2016). Application of maturity assessment tools in the innovation process: converting system's emergent properties into technological knowledge. *RAI Revista de Administração E Inovação*, 13(2), 145–153. <https://doi.org/10.1016/j.rai.2015.08.001>
- [49] London, M. A., Holzer, T. H., Eveleigh, T. J., & Sarkani, S. (2014). Incidence matrix approach for calculating readiness levels. *Journal of Systems Science and Systems Engineering*, 23(4), 377–403.
<https://doi.org/10.1007/s11518-014-5255-8>
- [50] Magnaye, R. B., Sauser, B. J., & Ramirez-Marquez, J. E. (2010). System development planning using readiness levels in a cost of development minimization model. *Systems Engineering*, 13(4), 311–323. <https://doi.org/10.1002/sys.20151>
- [51] Magnaye, R., Sauser, B., Patanakul, P., Nowicki, D., & Randall, W. (2014). Earned readiness management for scheduling, monitoring and evaluating the development of complex product systems. *International Journal of Project Management*, 32(7), 1246–1259.
<https://doi.org/10.1016/j.jiproman.2014.01.009>
- [52] Maier, M. W., & Rechtin, E. (2000). *The art of*

- systems architecting (2nd ed.). Boca Raton, USA: CRC Press.
- [53] Mankins, J. C. (1995). Technology Readiness Levels. Washington, USA. <https://doi.org/10.1080/08956308.2010.11657640>
- [54] Mankins, J. C. (2009). Technology readiness assessments: A retrospective. *Acta Astronautica*, 65(9–10), 1216–1223. <https://doi.org/10.1016/j.actaastro.2009.03.058>
- [55] Mantere, E. (2014). *Utilization of the Integration Readiness Level in Operative Systems*. Laurea University of Applied Sciences. Retrieved from https://www.theseus.fi/bitstream/handle/10024/95769/Mantere_Eeva.pdf?sequence=1
- [56] Mantere, E., & Pirinen, R. (2014). Utilization of the integration readiness level in operative systems. In *2014 International Conference on Interactive Collaborative Learning (ICL)* (pp. 726–735). IEEE. <https://doi.org/10.1109/ICL.2014.7017860>
- [57] Mapamba, L. S., Conradie, F. H., & Fick, J. I. J. (2016). Technology assessment of plasma arc reforming for greenhouse gas mitigation: A simulation study applied to a coal to liquids process. *Journal of Cleaner Production*, 112, 1097–1105. <https://doi.org/10.1016/j.jclepro.2015.07.104>
- [58] Mcconkie, E., Mazzuchi, T. A., Sarkani, S., & Marchette, D. (2013). Mathematical properties of System Readiness Levels. *Systems Engineering*, 16(4), 391–400. <https://doi.org/10.1002/sys.21237>
- [59] National Aeronautics and Space Administration - NASA. (2017). NASA Systems Engineering Handbook (SP-2016-6105) Rev 2. Washington, USA: NASA. Retrieved from <https://www.nasa.gov/feature/release-of-revision-to-the-nasa-systems-engineering-handbook-sp-2016-6105-rev-2>
- [60] Nolte, W. L., Kennedy, B. M., & Dziegiel, R. J. J. (2003). *Technology Readiness Level Calculator. White Paper: Air Force Research Laboratory, 2004*.
- [61] Olechowski, A. L., Eppinger, S. D., & Joglekar, N. R. (2015). Technology readiness levels at 40: A study of state-of-the-art use, challenges, and opportunities. In *Portland International Conference on Management of Engineering and Technology (PICMET)*. Portland, USA: IEEE. <https://doi.org/10.1109/PICMET.2015.7273196>
- [62] Peterson, M. R., & Rodberg, E. H. (2005). Spacecraft Integration and Test. In V. L. Pisacane (Ed.), *Fundamentals of Space Systems* (2nd ed., pp. 725–753). New York, USA: Oxford University Press.
- [63] Pirinen, R. (2014). Studies of Integration Readiness Levels: Case Shared Maritime Situational Awareness System. In *EEE Joint Intelligence and Security Informatics Conference*. The Hague, Netherlands: IEEE. <https://doi.org/10.1109/JISIC.2014.79>
- [64] Ramamoorthy, C. V., Chandra, C., Kim, H. G., Shim, Y. C., & Vij, V. (1992). Systems integration: problems and approaches. In *Proceedings of the Second International Conference on Systems Integration* (pp. 522–529). Morristown, USA: IEEE Comput. Soc. Press. <https://doi.org/10.1109/ICSI.1992.217311>
- [65] Rechtin, E. (2000). *Systems architecting of organizations: why eagles can't swim*. Boca Raton, USA: CRC Press.
- [66] Ristinen, T. (2010). *Expert Elicitation in Technology Readiness Assessment*. Aalto University, Espoo, Finland. Retrieved from <http://lib.tkk.fi/Dipl/2010/urn100340.pdf>
- [67] Ross, A. M., Hastings, D. E., Warmkessel, J. M., & Diller, N. P. (2004). Multi-Attribute Tradespace Exploration as Front End for Effective Space System Design. *Journal of Spacecraft and Rockets*, 41(1), 20–28. <https://doi.org/10.2514/1.9204>
- [68] Sadin, S. R., Povinelli, F. P., & Rosen, R. (1989). The NASA technology push towards future space mission systems. *Acta Astronautica*, 20, 73–77. [https://doi.org/10.1016/0094-5765\(89\)90054-4](https://doi.org/10.1016/0094-5765(89)90054-4)
- [69] Sage, A. P., & Lynch, C. L. (1998). Systems Integration and Architecting: An Overview of Principles, Practices, and Perspectives. *Systems Engineering*, 1(3), 176–227. [https://doi.org/10.1002/\(SICI\)1520-6858\(1998\)1:3<176::AID-SYS3>3.0.CO;2-L](https://doi.org/10.1002/(SICI)1520-6858(1998)1:3<176::AID-SYS3>3.0.CO;2-L)
- [70] Sauser, B. J., Gove, R., Forbes, E., & Ramirez-marquez, J. E. (2010). Integration maturity metrics : Development of an integration readiness level. *Information Knowledge Systems Management*, 9(1), 17–46. <https://doi.org/10.3233/IKS-2010-0133>
- [71] Sauser, B. J., Long, M., Forbes, E., & McGrory, S. E. (2009). Defining an Integration Readiness Level for Defense Acquisition. *INCOSE International Symposium*, 19(1), 352–367. <https://doi.org/10.1002/j.2334-5837.2009.tb00953.x>
- [72] Sauser, B. J., & Magnaye, R. (2010). Optimization of System Maturity and Equivalent System Mass for Exploration Systems Development. In *8th Conference on Systems Engineering Research*. Hoboken, NJ, USA. Retrieved from <https://ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/20100001612.pdf>
- [73] Sauser, B. J., Ramirez-Marquez, J. E., Henry, D., & DiMarzio, D. (2008). A system maturity index for the systems engineering life cycle. *International Journal of Industrial and Systems Engineering*, 3(6), 673–691.

- <https://doi.org/https://doi.org/10.1504/IJISE.2008.02068>
- [74] Sauser, B. J., Ramirez-marquez, J. E., & Tan, W. (2008). A Systems Approach to Expanding the Technology Readiness Level within Defense Acquisition. *International Journal of Defense Acquisition Management*, 1, 39–58.
- [75] Sauser, B. J., Reilly, R. R., & Shenhar, A. J. (2009). Why projects fail? How contingency theory can provide new insights - A comparative analysis of NASA's Mars Climate Orbiter loss. *International Journal of Project Management*, 27(7), 665–679. <https://doi.org/10.1016/j.ijproman.2009.01.004>
- [76] Sauser, B. J., Verma, D., Ramirez-Marquez, J., & Gove, R. (2006). From TRL to SRL: The concept of systems readiness levels. In *Conference on Systems Engineering Research*. Los Angeles, USA. Retrieved from <http://www.boardmansauser.com/downloads/2005SauserRamirezVermaGoveCSER.pdf>
- [77] Shenhar, A., Dvir, D., Milosevic, D., Mullenburg, J., Patanakul, P., Reilly, R., ... Srivannaboon, S. (2005). Toward a NASA-Specific Project Management Framework. *Engineering Management Journal*, 17(4), 9. <http://dx.doi.org/10.1080/10429247.2005.11431667>
- [78] Sillitto, H. (2005). Some really useful principles: A new look at the scope and boundaries of systems engineering. *INCOSE International Symposium*, 15(1), 911–922. <https://doi.org/10.1002/j.2334-5837.2005.tb00719.x>
- [79] Sivlen, E., & Pirinen, R. (2014). Utilization of the integration readiness level in the context of industrial system projects. In *International Conference on Interactive Collaborative Learning (ICL)*. Dubai, United Arab Emirates: IEEE. <https://doi.org/10.1109/ICL.2014.7017856>
- [80] Tomaschek, K., Olechowski, A. L., Eppinger, S. D., & Joglekar, N. R. (2016). A Survey of Technology Readiness Level Users. In *INCOSE International Symposium (IS 2016)* (Vol. 26, pp. 2101–2117). Edinburgh, UK. <https://doi.org/10.1002/j.2334-5837.2016.00283.x>
- [81] Ulrich, K. (1995). The role of product architecture in the manufacturing firm. *Research Policy*, 24(3). [https://doi.org/10.1016/0048-7333\(94\)00775-3](https://doi.org/10.1016/0048-7333(94)00775-3)
- [82] Ulrich, K. T., & Eppinger, S. D. (2012). *Product Design and Development* (5th ed.). New York, USA: McGraw-Hill.
- [83] Yasseri, S. (2013). Subsea system readiness level assessment. *Underwater Technology*, 31(2), 77–92. <https://doi.org/10.3723/ut.31.077>
- [84] Yasseri, S. (2016). A measure of subsea systems' readiness level. *Underwater Technology*, 33(4), 215–228. <https://doi.org/10.3723/ut.33.215>
- [85] Zandi, I. (1986). Science and engineering in the age of systems. *Pennsylvania: University of Pennsylvania*, (3), 1–16. Retrieved from http://www.incose.org/delvalley/Zandi_Paper.pdf