

# Behavior of Outrigger Wall and Wall Belt Supported System under Lateral Loads in a Structure: A Review

Urjal Das<sup>1</sup>, Ankit Pal<sup>2</sup>, Arvind Vishwakarma<sup>3</sup>

<sup>1</sup>M Tech Scholar, Department of Civil Engineering, Oriental University, Indore, India

<sup>2,3</sup>Assistant Professor, Department of Civil Engineering, Oriental University, Indore, India

Email: [ankitpal@orientaluniversity.in](mailto:ankitpal@orientaluniversity.in), Email: [arvindvishwakarma@orientaluniversity.in](mailto:arvindvishwakarma@orientaluniversity.in)

**Abstract**— Every Structure needs a table to withstand a system of resisting other forces caused by wind or strong earthquakes. One of the best programs is outrigger. Outriggers of structural elements support the formation of lateral loads together. When the complexity of the height of the buildings is increased they become larger as well as the addition of tempting additions to resist systems such as truss consists of belt and outriggers is needed. Utilization of structural regulation adds structural strength by connecting the main building with the remote colony and making the whole body function as a single unit in resistance to the burden. The current review articles deals with the research based on the Outrigger Wall and Wall Belt Supported System by different researchers. The observation includes based on the reviews in that inputs of Outrigger Wall and Wall Belt increase the performance of building in terms of stability, stiffness, strength & cost. It also concluded that this performance are vary with variation is occurs in the location and dimensions parameters such height, depth and plan areas. The research also impact on the system is used as per the guidelines provided.

**Keywords**— Lateral load, Multistoried building, Outrigger system, Shear wall belt, Stability increment

## I. INTRODUCTION

Due to the increasing demand for high-quality and architectural impactful structures and customized roundabouts and roundabouts, different themes, and the increase in height on a daily basis lead to new challenges and the need for new safety systems. In order to withstand earthquakes and strong winds due to the growth of the building, such as the increased instability of the building and the high altitude we need to destroy some protective measures. The slight example consist are bracings, shear-wall, outrigger-system and more. Outrigger Structure Outrigger & Wall belts Since noticing the competition is still taking place in the country. The reason taken under it that when structural load is taken, with vertical and horizontal supports system, obtained a huge amount of combined loads that are generated by the structure and that load must be supported by the structure itself. Since the earthquake produces oscillations from the ground, they are connected to the structure and the most effective way to use it to resist the structure through utilization of these combined system for the use of stabilizers, straps supported by the system, and stabilizing & system consist support strap.

## II. OUTRIGGERS

Outriggers are defined as the members who consist of the beams or contact plates from the center to the outside of the posts on both sides that block the structure and operation of the connecting links. The core was provided as a detachable bar holding the entire structure firmly to accommodate loads and moving equal loads out of poles. Greater stiffness is accomplished in this type of structure than conventional frame. An outrigger combines the two elements adding a strong solid that interferes with emergency power. If an outrigger-reinforced building under wind or seismic loads deflection, the outrigger connects the main wall to and away from the posts, a unit to resist lateral loads is act on replaced the full structural system.

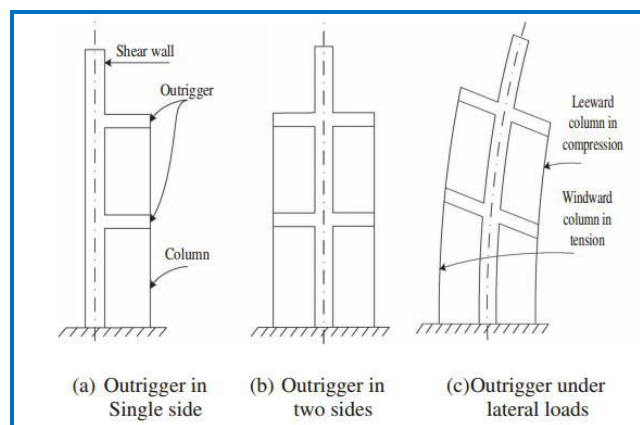


Fig. 1: Concept of Outrigger (a, b) & its effect in Lateral Loads (c)

### III. BELT SUPPORTED SYSTEM

The best technique used in huge-story houses is to maintain the body whether it is a bar belt or a truss belt system. It representatives to the structural nodal points & communicate through it. They are termed as belt support systems the reason is the belt is usually made of trusses or bolts, connecting the structure line. The load departs from each member being distributed equally housing. In order to adapt to the force of the wave and to maintain the stability of the structure, the outer straps and straps are used. The Policy is that the outer poles are fitted with the centre of the bar with the braces and straps in one or more positions. The truss straps are attached to the outside pillar of the house while the outside holds them to the main or central vertical wall. The reason behind is this approach due to reduction value is occurs in interference structure with respect to the conventional method.

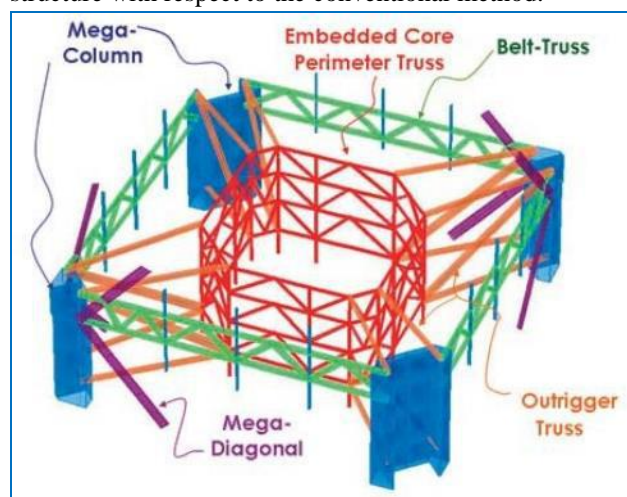


Fig. 2: Typical Concept of Belt Supported System

### IV. LITERATURE REVIEW

A review article is an article to gets the current state of a topic and to understand the current demand. A review article examines and shot way to represent past published work based on study, rather than reporting new facts or analyzes. It is termed as survey articles or, in news release, overview articles. For the current project the review of article is based on the Outrigger Wall, Wall Belt and Outrigger structure Subject area so that it is easy grapes the subject knowledge and implementation and future orientated work is carried out with the help of the reviews.

This article discusses the use of the stabilizer system for 30-story high-rise concrete buildings and its comparison with the same building without stabilizer systems. This article emphasizes the exact identification of the status of stabilizers in high-rise buildings. In the second case, the maintenance of the height of the building is the same as that of the normal building, the floor surface is increased by reducing the number of interior posts and without a stabilizer system and stability is checked. The results show the quality of the stabilizers on top and others at 0.5 times the height of the building. With the use of the stabilizer system, the change has been reduced by 26.69% (Nadh V.S., Sumanth B.H. (Feb.-2020))

The research is secondary times impact on the analysis reviews about the outrigger and belt-truss system design for high-rise construction. In this section, by presenting and detailing as much relevant information as possible, a guide is provided for the best fit and size of the outrigger system design. -is a guide that will provide an overview and explanation for applying ideas, concepts, methods, and techniques in reviewing articles for optimal topology and multiple designs. It concluded with a summary of the results of the revised research, understand how useful different limits reinforce the optimal concept of topology and the structural size of a high-rise and circular building. ma fusi-truss system (Alhaddad W., Halabi Y., & et.al. (Feb.-2020))

The articles are based on the study of the design of beam and beam systems for tall buildings. The primary focus is provided on optimal topology and outrigger system size design. The guide will provide an explanation and description of the theories, assumptions, concepts, and methods used in the reviewed articles for optimal topology and size design. The review obtained is useful to understand how different parameters influence the optimal topology and size design of a tall building with truss and truss system. The system meets the initial and final design stages. The codal approach is also adopted by

composing a standard or special code for designing tall buildings (**Alhaddad W., Halabi Y. & et. al.(2020)**)

This article examines the rigid and specific foundation of high-level structures under load. First, a static analysis was performed for four different system structures (such as weather-resistant body, fence, and outrigger body structure (OBF) systems). Under the same static load, the stabilizer reinforcement system was found to provide better control over the high-altitude structure. To obtain these results, a detailed analysis was performed to show how well the immune system was stimulated. Second, detailed analyzes were evaluated to assess the vibration response of a high-rise building. For this reason, the stabilizer system was compared to pendulum-tuned mass dampers (PTMD). The analytical model simulates the supply of the stabilizer decreasing even further by 33% for one and 60% for the solution for the two at the top of the transition. This change in response was confirmed by a detailed solution for the top and middle of the building. The potential reduction rates of the stabilizers received 40% with PTMD and 35% respectively. Based on comparative statistics and solid OBF details, it was found to be a useful addition to the rolling frame (**Salman K., Kim D. & et. al. (2020)**)

The study examines the concept of outdoor storage and considers the layout of the soils. For this reason, a central pull-wall belt of a high-rise steel building is considered. The storage of clay soil under this framework and what is happening to the soil - is subject to soil stimulation. When studying this system, the correct methods are used in Open Sees. In addition, an analysis of an action and decision is made between these decisions and the decisions associated with the system and the policy. Optimised location of outrigger-strap truss system is based on the consideration of the top roof substitute, time base and partition structure and with no interaction of ground-structure. The outputs showed that SSI infection affects the location of the outside of the seat-belts. A detailed analysis of all the data, such as the structural and structural correlation of the soils, showed that the availability of the bond at high altitudes resulted in a lower roof thickness. (**Tavakoli R., Kamgar R. (Feb.-2019)**)

The researcher's patel & jamle worked on outrigger system is made for details because of the fact that the best system is available for high-rise buildings and on the skies. In this system, the outer lines are connected to the main inward or outward path by strong loads on different floors against the shock and moderate action of the main parent should be seismic and windy. In this paper various papers presenting this subject are reviewed to perform a

great deal of work done in this first field. On reviewed the research, it comes about the proven result that drives the development of our research. It also faces the multi-story building to do details for the 13 floors. A total of 13 cases are shown in twin towers with different floor sizes and the best conditions are notoriously resistant to movement. The tower is being considered for zone 4 against dirt roads. Studies have been completed against different segments of seismic, there is an increase in the pit & it is on the roof. Preliminary results of more than one case and the various cases are recommended with the help of statistical data and analysis Staad-pro. The main component of the welding plate is a flexible part of the welding wall, its width and thickness (**Patel N. & Jamle S.(Aug.-2019)**)

Researchers are testing the Ground with ten Storey, 3-dimensional modeled under the influence of earthquakes. Site outrigger based on Taranath method. Response methods have been used for monitoring the performance of seven-stage configurations including conventional, core welds, outrigger and wall belts and outrigger and truss belt support systems. The Base velocity, axial column strengths and members of the axial velocity were studied. Very good chapters for all the topics discussed in this article as well. The results of the Base Shear show that the response is more important than the general structure which seems to be very useful under the normal wave of the normal structure and the main separation. Shear Core outrigger and wall support systems show significant correlation between all time-resistant cases. Underneath the powerhouse shows a great deal when only Shear Core applications will be used. both concepts are useful in separating forces for both Y and Z sides in agents. The regulation of the agents saw good and good sanctity for the construction in the lower partition and the fence. Summary parameter management issues in both Shear Core outrigger and bar support systems. The latter as a Wall strap Wall is more useful than system truss straps (**Dangi A. & Jamle S. (Sept.-2018)**)

The work involves outdoor frames and fence posts that are widely used to reduce drift. Three-dimensional models for the G + 45 concrete structure are being developed and the results are detailed for themselves. For the conflict of zones specific to zone 2 and the method described in IS: 1893 (part1) -2002. Therefore the analysis of wind load can be taken from IS: 875 (section 3) -1987 Finally, a comparison of the periodic studies on the energy generated and used the system "ETABSv.16". Regulation of changes such as back-to-back, treadmill baths, time connection and optimum condition are

associated with outrigger and brake pads (**Mathew M., (June-2017)**)

A list of articles being made for the study of the improvement of spinal cord and their behaviour towards emergency loads. While vertical walls resist large areas of lateral load on the basement of the building and lateral load supported framed on the building consist upper part which is suitable for weak high-rise buildings, buildings are similar in nature built in India, as per India habituation concept floors are utilised as a parking and garages or offices and the upper floors places. This result of the G + 10 structural velocity project reduces the importance of von-misses reinforcement and structural changes in site 1 compared to site 2. Similarly the result is in G + 20 wall-to-wall structures have less significant fracture sites in site 2 compared to site 1. The end of the G + 26 floor structure was concluded to reduce the importance of von-misses sites and less inconvenience to the structure in place 1 compared to place 2 (**Soni P., Tamrakar P.L. & et. al.(Feb.-2016)**)

Examination of texture notes in this paper on various aspects of regulatory structures such as; Status of outrigger configuration in high-rise RC housing, Outrigger model behaviour in High-Rise Steel and integrated housing, outrigger model behaviour in rotating wheel structure and Impact of seismic on structural design (**Gadkari -P. , Gore-G. (2016)**)

The researchers of this paper summarize in detail the Outriggers integration and the current practice of integrating Outriggers into high-rise buildings. Back to this various issues related to the Outriggers have also been discussed. Detailed descriptions of the articles available in the field of Outrigger system are in place and the summaries and opportunities encountered in the study are listed in this document. A new Virtual Outrigger concept is introduced in this paper. It is utilise for the the seat belt in the house for increment in the performance of the house under the load force being studied. Emphasizes the greater benefits of hiring Virtual Outriggers than usual. It is also shown in the affected paper ideas under the Virtual Outrigger (**N.K., Gore N.G (June-2016)**)

An attempt is being made to investigate the inconsistency and behavior of the regulatory environment on by reduction in the depth of the exit & to provide steel structure. The steel and central structures and the steel structure and the layout of the foundations vary in the depth of the exterior. The reduction in the depth of the outrigger is taken as 2/3 and 1/3 of the maximum height with the full maximum height. Equivalent depth is taken for both belt-truss & a normal story and remained the same throughout the day. Key terms include accidental

mixing and slipping. From the analysis of the results obtained, the comparison of the outrigger movements with the upper floor depth and the depth reduction reveals a significant difference under load. (**Shah Kogilgeri S., Shanthapriya B. (July-2015)**)

This work is based on the effects of hurricanes and the evacuations of people outside of the 28, G+42and G+57 are being studied. There are some decisions have been made that will prohibit the opportunity to worked on upcoming area for the researchers. The civil engineer. The results of the demonstrations have significant implications for the higher structures. The increase is high but the same strategy is in place to reduce the complexity. To meet the maximum tensile need bracings are added and also the addition of additional resistance resistors for example truss straps & outriggers is required (**Fawzia S., Nasir A. & et. al. (2011)**)

This study is needed to identify the best location outside of high-rise influence of seismic conditions.. The storey consist 50 floors buildings surveyed and the levels having a highest peak in 3 levels of ground acceleration on the velocity of the points in each segment of the earthquake data were combined to provide a similar level of roadmap. The analysis of the response and behaviour of the building was considered with regard to the legalization of responses such as relocation and safety on the premises. This study showed that the standard deviation of the setting when the external level is 22-24 is higher. Thus it can be concluded that the optimal location are obtained in the range of 0.44-0.48 times its maximum location (**Herath N., Haritos N. & et. al. (2009)**)

The results of the researchers Bayati Z., M. Mahdikhani is on decrement in tension in the ligament with strong stimulants, by the analytical approach adopted for structural model built in Tehran Vanan Park. The results show that proper use of the multi-outriggers system can reduce home volatility. Other than this the outcomes consist of that the structure which having the multi-outriggers system reduced the elements and bases from the structure (**Bayati Z., M. Mahdikhani & et.al.(Oct.-2008)**)

## V. CONCLUSIONS

Based on the different researchers study on Outrigger Wall and Wall Belt Supported System the following conclusions are to be made. The points out conclusions are as follows:

1. The belt truss & outrigger system most accepted method for withstanding under lateral loads.



2. The maximum research is based on the optimum height, shear wall location and height, variations in outrigger depth etc.
3. The main aim of the researchers is to increase the stability of the building used, hence increment is observed by different researchers.
4. The structural form used by the Outrigger System for High-Rise, Composite Structure, Multi-Outriggers System, Unsymmetrical Tall Buildings, Steel Structure & braced frame system by different analysis. The bracing & Outriggers System is more priority in it and reduces the effect of lateral loads.
5. The checks made by different researches are seismic performance, impact in the cyclonic region, guideline adopted under for optimum topology concept and design consideration under sizes.
6. Under the behavior of the soil-structure interaction, the systems consist fixed base, location consist of the belt truss at the higher stories imparts the lesser amounts displacement.
7. Difficult connection due to the core is removed & with outrigger system, the structural materials can be applied effectively by utilizing the axial strength and stiffness of exterior columns.
8. The systems minimize hindered space compared to the traditional method. The floor space does not contain any columns and remains among the core and the external columns; consequently, increment in the functional efficiency of the building occurs.

### ACKNOWLEDGEMENT

I extend my deepest gratitude to Mr. Ankit Pal & Mr. Arvind Vishwakarma, Assistant Professor, Department of Civil Engineering, Oriental University, Indore, (M.P.), for providing all the required data's related to the project, learning of software tools and guidance to do successful completion of this work.

### REFERENCES

- [1] Patel N. & Jamle S. (Aug.-2019) "Use of Shear Wall Belt at Optimum Height to Increase Lateral Load Handling Capacity in Multi-story Building: A Review" International Journal of Advanced Engineering Research and Science (IJAERS), Vol-6, Issue-4, Apr-2019, ISSN:2349-6495(P),2456-1908(O), pp310-314. <https://dx.doi.org/10.22161/ijaers.6.4.36>,
- [2] Soni P., Tamrakar P.L. & et. al. (Feb.-2016) "Structural Analysis of Multi-story Building of Different shear Walls Location and Heights" International Journal of Engineering Trends and Technology (IJETT), Volume 32, Number 1- ISSN: 2231-5381, pp 50-57.
- [3] Dangi A. & Jamle S. (Sept.- 2018) "Determination of Seismic parameters of R.C.C. Building Using Shear Core Outrigger, Wall Belt and Truss Belt Systems" International Journal of Advanced Engineering Research and Science (IJAERS), Vol-5, Issue-9, Sept- 2018, ISSN:2349-6495(P),2456-1908(O), pp-305-309. <https://dx.doi.org/10.22161/ijaers.5.9.36>
- [4] Alhaddad W., Halabi Y., & et.al. (Feb.-2020) "Outrigger and Belt-Truss System Design for High-Rise Buildings: A Comprehensive Review Part II—Guideline for Optimum Topology and Size Design" Hindawi Advances in Civil Engineering, Volume 2020, Article ID 2589735, pp 1-30, <https://doi.org/10.1155/2020/2589735>-
- [5] Ddd Fawzia S. , Nasir A. & et. al. (2011) Study of the Effectiveness of Outrigger System for High-Rise Composite Buildings for Cyclonic Region, World Academy of Science, Engineering and Technology 60 , pp 937-943
- [6] Bayati Z., M. Mahdikhani & et.al.(Oct.-2008) "Optimized Use Of Multi-Outriggers System To Stiffen Tall Buildings" The 14th World Conference on Earthquake Engineering Beijing, China , pp- 12-17, 2008,
- [7] Alhaddad W., Halabi Y. & et. al.(2020) "Outrigger and Belt-Truss System Design for High-Rise Buildings: A Comprehensive Review" Part II—Guideline for Optimum Topology and Size Design, Hindawi Advances in Civil Engineering, Volume, Article-ID-2589735, pp-1-30, <https://doi.org/10.1155/2020/2589735>
- [8] Mathew M., (June-2017) Optimum Position of Outrigger with Belt Wall International Journal of Innovative Research in Science, Engineering and Technology, Vol. 6, Issue 6, June 2017, ISSN(Online) : 2319-8753, ISSN (Print) : 2347-6710, pp 10376-10372, DOI:10.15680/IJIRSET.2017.0606033
- [9] Herath N., Haritos N. & et. al. (2009) "Behaviour of Outrigger Beams in High rise Buildings under Earthquake Loads" Australian Earthquake Engineering Society 2009 Conference
- [10] Nadh V.S., Sumanth B.H. (Feb.- 2020 ) Ideal Location Of Outrigger System And Its Efficiency For Unsymmetrical Tall Buildings Under Lateral Loadings, International Journal Of Scientific & Technology Research volume 9, ISSUE 02, ISSN 2277-8616, Pp 2917-2920.
- [11] Sagar Jamle and Shirish Kumar Kanungo, (2020), "Determination of Stable Underground Storage Reservoir System- Recent Advancements in Structural Engineering Volume 1", LAP LAMBERT Academic Publishing, Mauritius, ISBN: 978-620-2-51435-4.
- [12] Mariyam and Sagar Jamle (2020), "Wind Analysis of Flat Slab Multistoried Building Construction: "Recent Advancements in Structural Engineering": Volume II, LAP LAMBERT Academic Publishing, Mauritius.
- [13] Pankaj Kumar Dhakad, Sagar Jamle, (2020), "Base Shear Reduction by Using Optimum Size of Beams in Top Floors with Different Grades in Multistoried Building at Different Levels", International Journal of Advanced Engineering Research and Science, (ISSN: 2456-1908 (O), 2349-6495(P)), vol. 7, no. 4, pp. 293-296. <https://dx.doi.org/10.22161/ijaers.7.4.20>

- [14] Gadkari A.P. , Gore N. G. (2016) "Review on Behaviour of Outrigger Structural System in High-Rise Building" IJEDR 2016 , Volume 4, Issue 2, ISSN: 2321 -9939
- [15] Kogilgeri S. , Shanthapriya B. (July-2015) "A Study On Behaviour Of Outrigger System On High Rise Steel Structure By Varying Outrigger Depth Srinivas" International Journal of Research in Engineering and Technology Volume-04 Issue: 07, e ISSN: 2319-1163, p ISSN: 2321-7308, pp 434-438.
- [16] Shah N.K., Gore N.G (June-2016) "Review on Behaviour of Outrigger System in High Rise Building" International Research Journal of Engineering and Technology (IRJET), e-ISSN: 2395 -0056, Volume-03, Issue-06, p-ISSN: 2395-0072, Pp 2803-2809.
- [17] Salman K. , Kim D. & et. al. (2020)Optimal control on structural response using outrigger braced frame system under lateral loads , Journal of Structural Integrity and Maintenance ISSN: 2470-5314 (Print) 2470-5322 (Online) vol. 5, no. 1, Pp 40–50 <https://doi.org/10.1080/24705314.2019.1701799>
- [18] Tavakoli R. , Kamgar R. (Feb.-2019) "Seismic performance of outrigger–belt truss system considering soil–structure interaction" International Journal of Advanced Structural Engineering, pp 45-54, <https://doi.org/10.1007/s40091-019-0215-7>
- [19] Bhagwat Mahajan, Sagar Jamle, (2020), "Stability Increment Techniques by Altering Beam Members: A Review", International Journal for Research in Applied Science & Engineering Technology (IJRASET), ISSN: 2321-9653, vol. 8, no. 6, pp. 1403-1407. <http://doi.org/10.22214/ijraset.2020.6227>
- [20] Archit Dangi, Sagar Jamle, (2019), Stability Enhancement of Optimum Outriggers and Belt Truss Structural System", International Research Journal of Engineering and Technology, (ISSN: 2395-0072(P), 2395-0056(O)), vol. 6, no. 2, pp. 772-780.
- [21] Sunil Rathore. , Ankit Pal , Arvind Vishwakarma. (2020) Accumulative Stability Increment of Multi-Storey Building Rested over Soft, Medium and Hard Soil using Different Grades of Concrete in Beam Journal of Xi'an University of Architecture & Technology, Volume XII, Issue VIII, 2020 <https://doi.org/10.37896/JXAT12.08/2627> ISSN No. : 1006-7930 pp 260-277
- [22] Sagar Jamle, Nirmal Delmiya, Rahul Singh, (2020), "Efficient Use of UPV Meter: A Non Destructive Test of Concrete by Fragmentation Analysis", Journal of Xi'an University of Architecture & Technology, ISSN: 1006-7930, vol. 12, no. 4, pp. 3385-3394. <https://doi.org/10.37896/JXAT12.04/1078>
- [23] Sunil Rathore, Ankit Pal, Arvind Vishwakarma. (2020). Accumulative Stability Increment of Multi-Storey Building Rested Over Soft, Medium and Hard Soil: A Review International Journal of Advanced Engineering Research and Science (IJAERS), Vol.7, issue 7, <https://dx.doi.org/10.22161/ijaers.77.50>, ISSN: 2349-6495(P) | 2456-1908(O) pp 442-448
- [24] Manoj Patidar, Sagar Jamle, (2020), "Optimization of Stability of Multistoried Structure by Changing Grades of Concrete in Shear Wall Member", Journal of Xi'an University of Architecture & Technology, ISSN: 1006-7930, vol. 12, no. 4, pp. 2479-2497. <https://doi.org/10.37896/JXAT12.04/979>
- [25] Aasif Khan. , Ankit Pal. (2020) Reduction of Base Shear Using Different Size of Columns with Same Concrete Grade in Multistoried Building under Seismic Loading Journal of Xi'an University of Architecture & Technology, Volume XII, Issue IV, 2020 <https://doi.org/10.37896/JXAT12.04/1240> ISSN No. : 1006-7930 pp 5060-5069
- [26] Bhagwat Mahajan, Sagar Jamle, (2020), "Analytical Approach in Stability Enhancement Techniques by Altering Beam Members at Different Levels", International Journal of Advanced Engineering Research and Science (IJAERS), ISSN: 2349-6495(P) | 2456-1908(O), vol. 7, no. 6, pp. 301-308. <https://dx.doi.org/10.22161/ijaers.76.37>
- [27] Sagar Jamle, Dr. M.P. Verma, Vinay Dhakad, (2017), "Flat Slab Shear Wall Interaction for Multistoried Building under Seismic Forces", International Journal of Software & Hardware Research in Engineering (IJSHRE), ISSN: 2347-4890 Vol.-05, Issue-3, pp. 14-31.
- [28] Pahadiya R. , Pal A. (2020) Determination of Efficient Height Combination of Twin Tower under Seismic Loading International Journal of Advanced Engineering Research and Science Vol-7, Issue-5, DOI:<https://dx.doi.org/10.22161/ijaers.75.32>, ISSN: 2349-6495(P) 2456-1908(O) pp 263-270
- [29] Ahemad A., Pal, A. and Choudhary, M. (2020). Determine the Best Location of Porch in Multistory Building with Seismic Loading International Journal of Current Engineering and Technology, Vol.10, No.1 (Jan/Feb 2020)DOI:<https://doi.org/10.14741/ijcet/v.10.1.12> pp 72-77
- [30] Sagar Jamle, Dr. M.P. Verma, Vinay Dhakad, (2017), "Flat Slab Shear Wall Interaction for Multistoried Building Analysis When Structure Length is greater than width under seismic Forces", International Journal of Software & Hardware Research in Engineering (IJSHRE), ISSN: 2347-4890 Vol.-05, Issue-3, pp. 32-53.
- [31] Durgesh Kumar Upadhyay, Sagar Jamle, (2020), "Stability Enhancement in Wall Belt Supported Dual Structural System using Different Grades of Concrete", International Journal of Current Engineering and Technology, (ISSN: 2277-4106 (O), 2347-5161(P)), vol. 10, no. 2, pp. 237-242. <https://doi.org/10.14741/ijcet/v.10.2.8>
- [32] S.V. Jitesh T Chavda PG Student & et. al. (2013) Proceedings of Indian Geotechnical Conference December 22-24, Roorkee Seismic Behaviour Of Buildings On Different Types of Soil Ketan Bajaj, S.V. Jitesh T Chavda PG Student, Bhavik M Vyas
- [33] Mohammad Bilal Rasheed, Sagar Jamle, (2020), "Conceptual Approach on Effect of Various Concrete Grade in Outrigger and Wall Belt Supported System: A Perceptual Review", International Journal of Advanced Engineering Research and Science, (ISSN: 2456-1908 (O),

2349-6495(P)), vol. 7, no. 5, pp. 100-104.

<https://dx.doi.org/10.22161/ijaers.75.14>

- [34] Shahdab Khan, Sagar Jamle, (2020), "Use of Shear Wall Member at Corners to Enhance the Stability Using Different Grades: An Immense Review", International Journal of Advanced Engineering Research and Science, (ISSN: 2456-1908 (O), 2349-6495(P)), vol. 7, no. 5, pp. 396-400. <https://dx.doi.org/10.22161/ijaers.75.47>
- [35] Sagar Jamle and Roshan Patel, (2020), "Analysis and Design of Box Culvert- A Manual Approach in Structural Engineering", LAP LAMBERT Academic Publishing, Mauritius, ISBN: 978-620-0-78760-6.
- [36] Durgesh Kumar Upadhyay, Sagar Jamle, (2020), "A Review on Stability Improvement with Wall Belt Supported Dual Structural System Using Different Grades of Concrete", International Journal of Advanced Engineering Research and Science, (ISSN: 2456-1908 (O), 2349-6495(P)), vol. 7, no. 3, pp. 293-296. <https://dx.doi.org/10.22161/ijaers.73.43>